

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/095655 A1

(51) International Patent Classification⁷: **H01S 3/067**

[US/US]; 240 West Water Street, Painted Post, NY 14870 (US).

(21) International Application Number:

PCT/US2004/008097

(74) Agent: **SHORT, Svetlana, Z.**; Corning Incorporated, Patent Department, SP-TI-3-1, Corning, NY 14831 (US).

(22) International Filing Date: 17 March 2004 (17.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/459,842 1 April 2003 (01.04.2003) US
10/755,009 8 January 2004 (08.01.2004) US

(71) Applicant (for all designated States except US): **CORNING INCORPORATED** [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventor; and

(75) Inventor/Applicant (for US only): **WOOD, William, A.**


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **REDUCED CLAD DIAMETER RARE EARTH DOPED FIBER COILS AND OPTICAL AMPLIFIERS UTILIYING SUCH COILS**



2.



3

(57) Abstract: According to the present invention, a rare earth doped fiber coil comprises a rare doped optical fiber having a rare-earth doped core surrounded by a cladding. The outer clad diameter is less than 100 μ m. The rare earth doped optical fiber has a length of 10 m to 50m and is coiled with abend radius of less than 40mm.

WO 2004/095655 A1



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

**REDUCED CLAD DIAMETER RARE EARTH DOPED FIBER COILS AND
OPTICAL AMPLIFIERS UTILIZING SUCH COILS**

BACKGROUND OF THE INVENTION

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application Serial No. 60/459,842, filed April 1, 2003, entitled "Reduced Clad Diameter Rare Earth Doped Fiber Coils and Optical Amplifiers Utilizing Such Coils."

FIELD OF THE INVENTION

[0002] The present invention relates generally to optical rare-earth doped fibers with small clad diameters and, more specifically, to coiled or bent optical rare-earth doped fibers with small clad diameters.

TECHNICAL BACKGROUND

[0003] Rare earth doped optical fibers are commonly utilized in optical amplifiers. An example of optical amplifier is an erbium doped optical fiber amplifier (EDFA). A typical erbium doped fiber has an outer clad diameter of 125 μm . When this type of fiber is coiled such that bend radius is small (35 mm or smaller), the fiber coils suffer from bend-induced birefringence. The tighter (smaller) the bend radius, the higher the amount of bend-induced birefringence. More specifically, the bend-induced birefringence is inversely proportional to the square of the bend radius. The bend induced birefringence results in Differential Group Delay or DGD. As illustrated in Figure 1, the smaller the bend radius, the greater the DGD. That is, due to bend-induced birefringence one polarization component of the optical signal propagates through the fiber faster than the other polarization component. As a result, because Polarization Mode Dispersion or PMD is the average of DGD values over the wavelength band, the bend induced birefringence also results in increased PMD. This is especially problematic in high data rate amplifiers because PMD broadens the signal pulse width, thereby limiting the error-free bit rate of a fiber optic transmission system. Thus, DGD

and PMD are limiting factors that prevent utilization of smaller coil diameters in high data rate optical amplifiers.

SUMMARY OF THE INVENTION

[0004] According to the present invention, a rare earth doped fiber coil comprises a rare earth doped optical fiber having a rare-earth doped core surrounded by a cladding. The outer clad diameter is less than 100 μ m. The rare earth doped optical fiber has a length of 10 m to 50m and is coiled with a bend radius of less than 40mm.

[0005] According to one embodiment, the rare earth doped optical fiber is an Er doped optical fiber.

[0006] According to one embodiment, the bend radius is between 8mm and 20mm.

[0007] According to one embodiment, the outer clad diameter is between 70 μ m and 95 μ m.

[0008] One advantage of the present invention is that the coiled optical fiber exhibits reduced DGD and PMD while utilizing lesser amount of glass to manufacture. Furthermore, the same length fiber may be packaged in a smaller volume, thus reducing the overall size of optical amplifiers. Consequently, the present invention may be utilized, for example, to manufacture optical amplifiers in significantly smaller packages or with ultra-low PMD.

[0009] Additional features and advantages of the invention will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the invention as described herein, including the detailed description which follows, the claims, as well as the appended drawings.

[0010] It is to be understood that both the foregoing general description and the following detailed description present exemplary embodiments of the invention, and are intended to provide an overview or framework for understanding the nature and character of the invention as it is claimed. The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate various embodiments of the invention, and together with the description, serve to explain the principles and operations of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] Figure 1 is an illustration of differential group delay DGD dependence on bend radius R ;

[0012] Figure 2 is a view of one embodiment of the present invention;

[0013] Figure 3 is a cross-sectional view of the optical fiber illustrated in Fig. 2;

[0014] Figure 4 illustrates the relationship between DGD and the outer clad diameter of two optical fibers with identical compositions; and

[0015] Figure 5 illustrates fiber profile of an exemplary rare earth doped fiber.

[0016] Figure 6 is a schematic of an optical amplifier that utilizes the fiber coil depicted in Fig. 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0017] Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings.

Whenever possible, the same reference numerals will be used throughout the drawings to refer to the same or like parts.

[0018] One embodiment of the reduced clad diameter rare earth doped fiber coil of the present invention is shown in **Figure 2**, and is designated generally throughout by the reference numeral 10. The fiber coil 10 has a bend radius (illustrated as coil radius R) of less than 40 mm. It is preferable, in order to be more compact while maintaining minimal PMD effects due to birefringence, that the bend radius R be between 8 mm and 35 mm, more preferably between 8 mm and 20 mm and most preferably between 10 mm and 15 mm. However, if the bend radius R becomes too small (i.e. less than 5 mm), then fiber bend loss increases and, even more importantly, fiber reliability may suffer, i.e. fiber life span may be shortened.

[0019] As embodied herein and depicted in **Figure 3**, this fiber coil 10 comprises a rare earth doped optical fiber 12 having a rare-earth doped core 14 surrounded by a cladding 16 with outer clad diameter d of less than 100 μm . It is preferable that the outer clad diameter d be in the range of 70 μm to 95 μm , more preferably in the range of 72 μm to 90 μm , and even more preferably in the range of 75 μm to 85 μm . The rare earth doped optical fiber has a length L of 10 m to 50 m and, when utilized in optical amplifiers, it is

often preferred that its length be in the 10 to 30m range. If the outer clad diameter d becomes too small (i.e., less than $70\mu\text{m}$), the fiber may become more difficult to handle, less strong and more sensitive to perturbations such as microbending.

[0020] Bend induced birefringence, DGD and PMD are all proportional to the square of the outer clad diameter d . Therefore, a reduction in a size of outer clad diameter from $125\mu\text{m}$ to $80\mu\text{m}$ should result in $(80/125)^2=0.41 \times \text{PMD}$ of the identical composition fiber with a $125\mu\text{m}$ outer diameter, or a 59% reduction in PMD. Similarly, a $90\mu\text{m}$ outer clad diameter should have only $0.52 \times \text{PMD}$ of the identical composition fiber with a $125\mu\text{m}$ outer diameter, or a 48% reduction in PMD.

[0021] **Figure 4** illustrates the relationship between DGD and the outer clad diameter of two exemplary optical fibers. Specifically, the vertical axis of **Figure 4** represents DGD (measured in fs). The horizontal axis is an inverse square of the fiber's outer clad diameter ($1/d^2$), in units of mm^{-2} . These measurements shown in **Figure 4** were performed using 20 m long fiber coils of various radii R . In these measurements, coil radii R were between 5 mm and 10 mm. Results for a rare earth doped fiber (Er doped fiber) with an outer clad diameter $d=125\mu\text{m}$ is denoted by line A. Another rare earth doped fiber with identical composition, but reduced clad diameter $d=80\mu\text{m}$ is denoted by line B. **Figure 4** clearly shows that fiber B suffers from much smaller amount of DGD than fiber A. The reduction in PMD is approximately consistent with the above calculation.

[0022] The exemplary fibers A and B have the following core composition: 8.6 wt% Al_2O_3 , 13.6 wt% GeO_2 , 700 wtppm Er_2O_3 . The fiber profile is illustrated in **Figure 5**. The claddings of these fibers is made of silica.

[0023] However, because DGD and PMD are proportional to a square of the fiber's outer clad diameter, as shown above, then regardless of fiber's composition, a reduction in the clad diameter of any coiled rare-earth doped optical fiber will result in better DGD, PMD and smaller package volume. The latter attribute is especially useful for reducing the overall size of optical amplifiers.

[0024] As embodied herein and depicted in **Figure 6**, an optical amplifier 20 may utilize rare earth doped fiber coil 10 as its amplification medium. In this exemplary amplifier, coil 10 is pumped by the pump source 22 (laser diode, for example) that is coupled to the rare-earth doped fiber 12 by an optical coupler 24. The optical coupler

24 provides both incoming optical signal S and the pump light from the pump source 22 to the rare earth doped fiber 12, which amplifies incoming signal S and provides, as an output, the amplified signal S'. Optionally, in order to provide additional pump power, another pump source 22' may also be coupled to the rare-earth doped fiber 12 via an additional optical coupler 24'.

[0025] As stated above, the rare earth doped amplifying fiber 12 of coil 10 has a rare earth doped core 14 surrounded by a cladding. The outer clad diameter d is less than 100 μm , preferably less than 95 μm , more preferably 90 μm or less, and most preferably 75 μm to 85 μm . The length of the rare earth doped optical fiber 12 is 10 m to 50 m and the bend radius is less than 40mm. It is preferred that the bend radius R be 35 mm or less, and more preferably 10mm to 20 mm.

[0026] It will be apparent to those skilled in the art that various modifications and variations can be made to the present invention without departing from the spirit and scope of the invention. Thus it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A rare earth doped fiber coil, said rare earth doped fiber coil comprising:
a rare earth doped optical fiber having a rare-earth doped core surrounded by a cladding with outer clad diameter of less than 100 μ m, said rare earth doped optical fiber having a length of 10 m to 50m and being coiled with a bend radius of less than 40mm.
2. The rare earth doped fiber coil according to claim 1, wherein said clad diameter is in the range of 70 μ m to 95 μ m.
3. The rare earth doped fiber coil according to claim 1, wherein said clad diameter is in the range of 72 μ m to 90 μ m
4. The rare earth doped fiber coil according to claim 1, wherein said clad diameter is in the range of 75 μ m to 85 μ m.
5. The rare earth doped fiber coil according to claim 1, wherein said rare earth doped optical fiber is an Er doped optical fiber.
6. The rare earth doped fiber coil according to claim 5, wherein said bend radius is between 8mm and 35mm
7. The rare earth doped fiber coil according to claim 5, wherein said bend radius is between 8mm and 20mm.
8. The rare earth doped fiber coil according to claim 5, wherein said bend radius is between 10mm and 15mm.
9. The rare earth doped fiber coil according to claim 1, wherein said bend radius is between 8mm and 20mm.

10. The rare earth doped fiber coil according to claim 1, wherein said bend radius is between 10mm and 15mm.
11. An optical amplifier comprising: a length of rare earth doped amplifying fiber, said amplifying fiber having a rare-earth doped core surrounded by a cladding with outer clad diameter of less than 100 μ m, said rare earth doped optical fiber having a length of 10 m to 50m and being coiled with a bend radius of less than 40mm.
12. The optical amplifier according to claim 10, wherein said rare earth doped optical fiber is an Er doped optical fiber.
13. The optical amplifier according to claim 10, wherein said bend radius is between 8mm and 20mm.
14. The optical amplifier according to claim 10 wherein said clad diameter is between 70 μ m and 95 μ m.
15. The optical amplifier according to claim 10 wherein said outer clad diameter is between 72 μ m and 90 μ m.
16. The optical amplifier according to claim 10 wherein said outer clad diameter is between 75 μ m and 85 μ m.

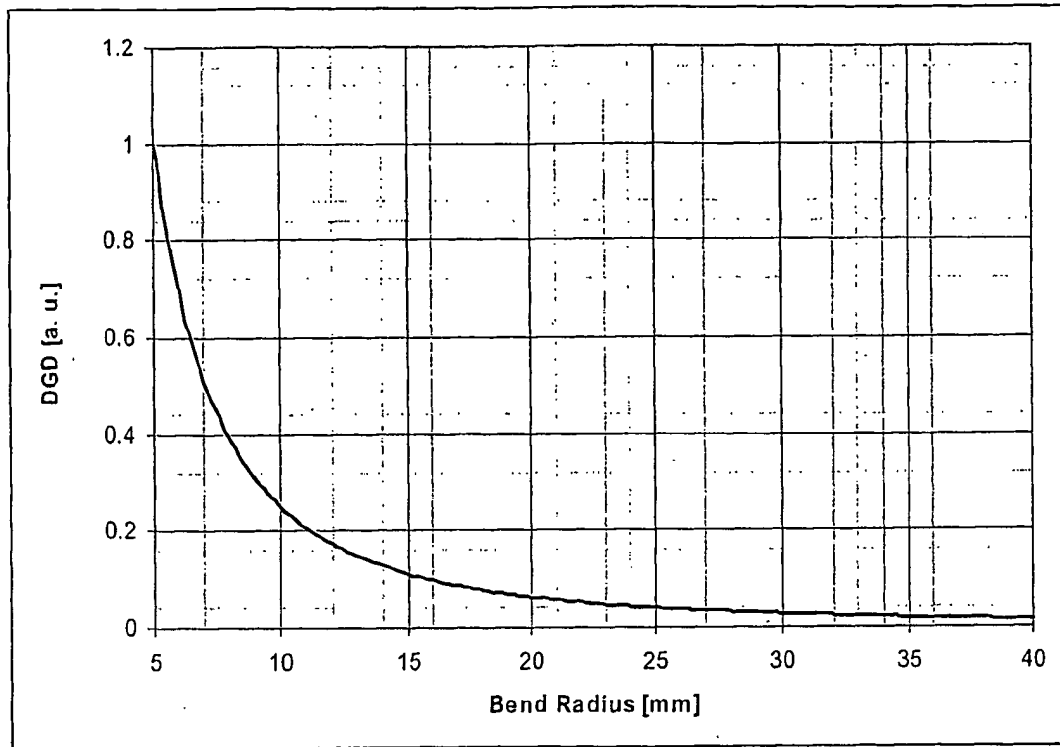


Figure 1

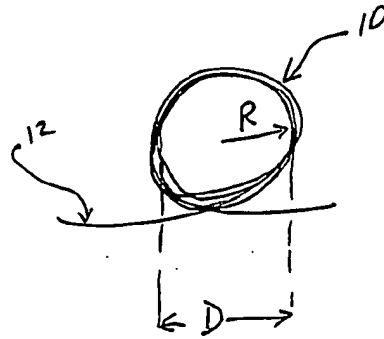


Figure 2.

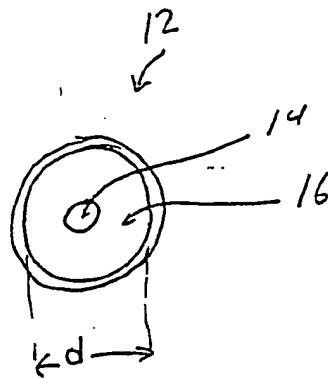


Figure 3

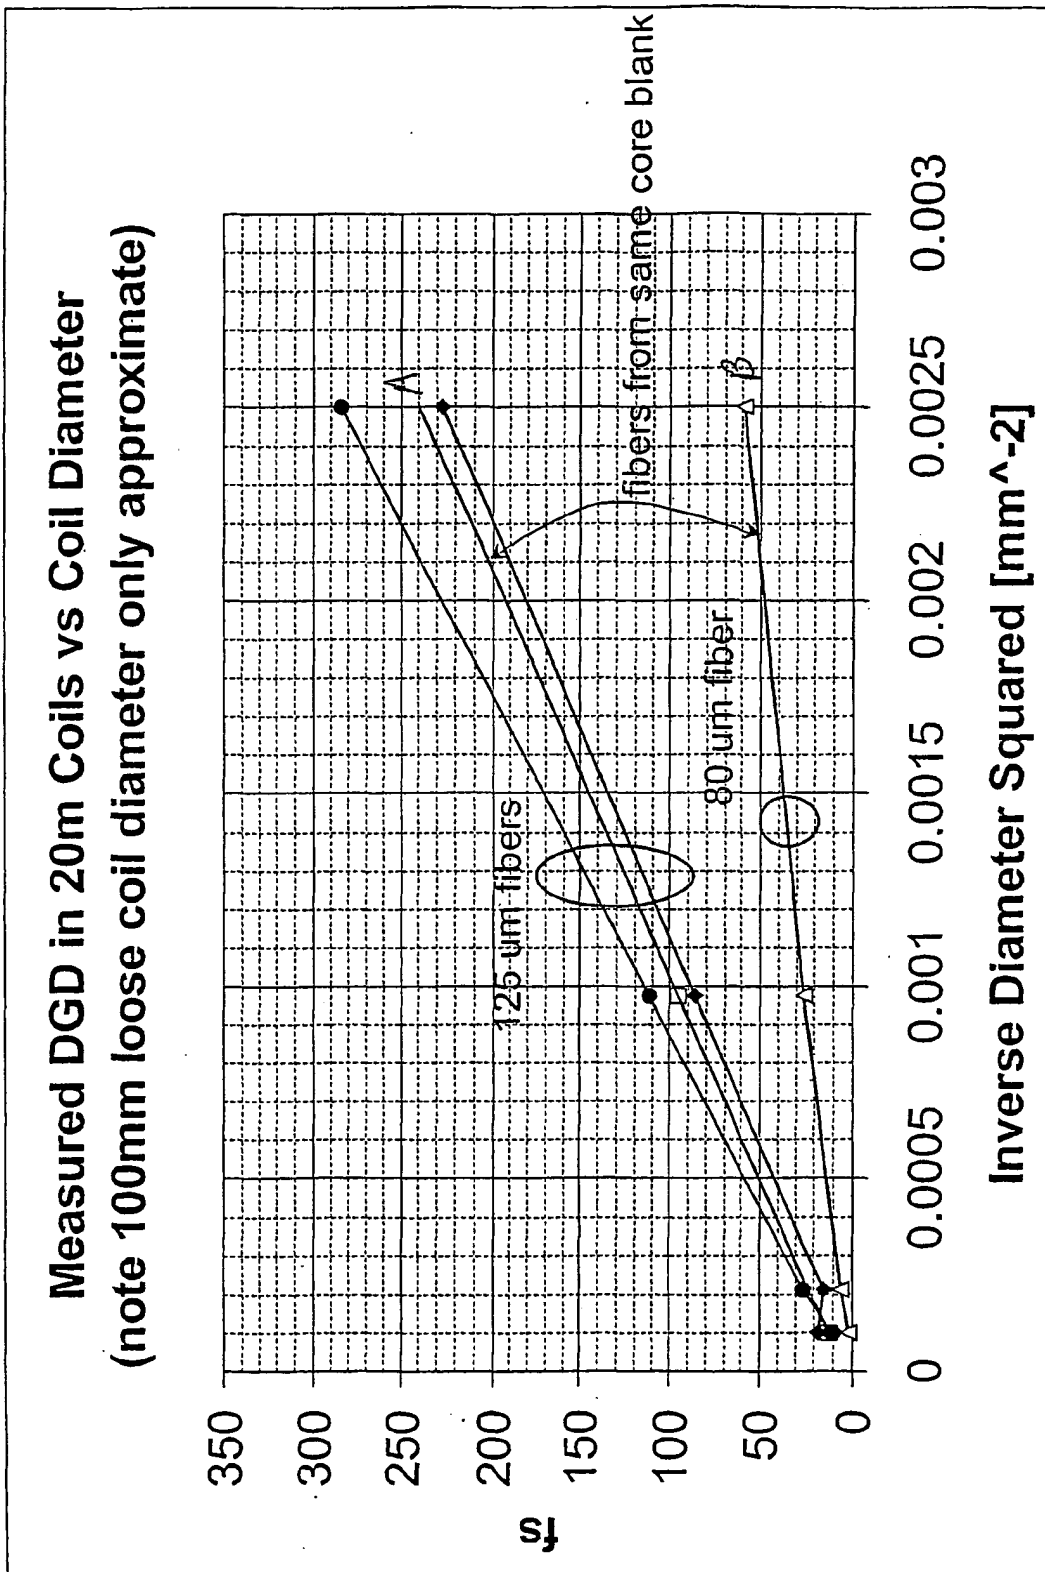


Fig. 4

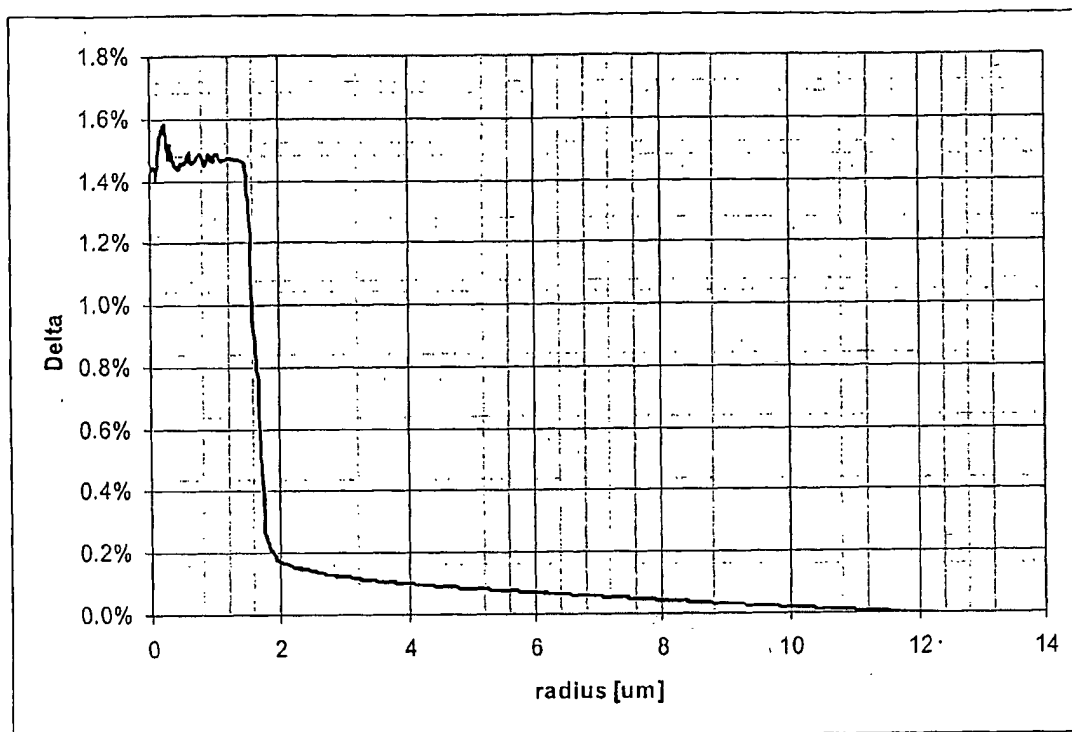


Figure 5

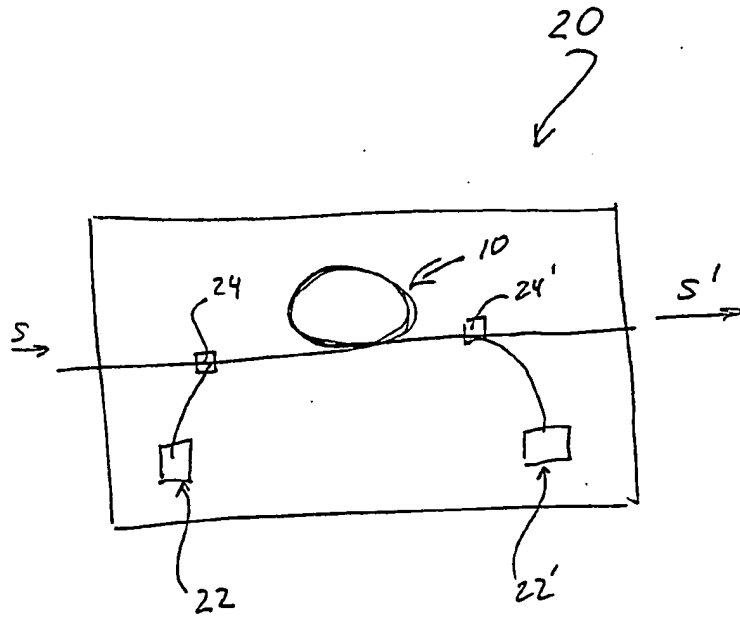


Figure 6

INTERNATIONAL SEARCH REPORT

national Application No

T/US2004/008097

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01S3/067

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 03/012489 A (CORNING INC) 13 February 2003 (2003-02-13) page 5, paragraph 27 page 8, paragraph 0038 page 9, paragraph 39; figure 3	1
A	the whole document	2-16
A	WO 00/43816 A (CORNING INC) 27 July 2000 (2000-07-27) abstract; figure 13	1-16
A	EP 0 442 553 A (PIRELLI CAVI SPA) 21 August 1991 (1991-08-21) page 6, line 6 - line 9	1-16
A	US 6 496 301 B1 (KLINER DAHY ET AL) 17 December 2002 (2002-12-17) column 12, lines 52,55,63	1-16
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

21 July 2004

Date of mailing of the international search report

02/08/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bésuelle, E

INTERNATIONAL SEARCH REPORT

ational Application No
/US2004/008097

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/011876 A1 (FIDRIC BERNARD G) 16 January 2003 (2003-01-16) column 3, paragraph 27; figure 5 -----	1-16
A	EP 0 637 762 A (FUJIKURA LTD) 8 February 1995 (1995-02-08) page 7, line 26 - line 29 -----	1-16
A	US 6 434 295 B1 (DOMINIC VINCENT G ET AL) 13 August 2002 (2002-08-13) column 6, line 53 - column 7, line 8 -----	1-16
A	WO 02/101889 A (CARTER ADRIAN ; NUFERN (US)) 19 December 2002 (2002-12-19) page 8, line 2 - line 8 -----	1-12
A	US 6 480 659 B1 (PATLAKH ANATOLY ET AL) 12 November 2002 (2002-11-12) column 8, line 17 - line 20 -----	1-16

INTERNATIONAL SEARCH REPORT

International Application No

/US2004/008097

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 03012489	A	13-02-2003	EP 1421418 A2 WO 03012489 A2 US 2003035638 A1	26-05-2004 13-02-2003 20-02-2003
WO 0043816	A	27-07-2000	AU 3582200 A CA 2360933 A1 CN 1347511 T EP 1181587 A1 JP 2002535715 T TW 419600 B WO 0043816 A1 US 6192179 B1 US 6429963 B1 US 6337763 B1	07-08-2000 27-07-2000 01-05-2002 27-02-2002 22-10-2002 21-01-2001 27-07-2000 20-02-2001 06-08-2002 08-01-2002
EP 0442553	A	21-08-1991	IT 1237980 B AT 119690 T AU 642698 B2 AU 7081891 A BR 9100633 A CA 2034797 A1 CN 1054137 A ,B CS 9100300 A2 DE 69107872 D1 DE 69107872 T2 DK 442553 T3 EP 0442553 A1 ES 2072523 T3 FI 910649 A HK 2596 A HU 60398 A2 IE 910440 A1 JP 3239124 B2 JP 4298724 A KR 178393 B1 NO 910530 A PL 289030 A1 PT 96736 A ,B SK 278814 B6 RU 2086062 C1 US 5161050 A	19-06-1993 15-03-1995 28-10-1993 15-08-1991 29-10-1991 13-08-1991 28-08-1991 15-09-1991 13-04-1995 07-09-1995 24-07-1995 21-08-1991 16-07-1995 13-08-1991 12-01-1996 28-08-1992 14-08-1991 17-12-2001 22-10-1992 15-05-1999 13-08-1991 26-08-1991 31-12-1992 04-03-1998 27-07-1997 03-11-1992
US 6496301	B1	17-12-2002	AU 5517301 A EP 1266259 A1 WO 0169313 A1	24-09-2001 18-12-2002 20-09-2001
US 2003011876	A1	16-01-2003	NONE	
EP 0637762	A	08-02-1995	DE 69424606 D1 DE 69424606 T2 EP 0637762 A1 US 5689578 A WO 9419714 A1	29-06-2000 25-01-2001 08-02-1995 18-11-1997 01-09-1994
US 6434295	B1	13-08-2002	NONE	
WO 02101889	A	19-12-2002	WO 02101889 A2	19-12-2002

INTERNATIONAL SEARCH REPORT

ational Application No
/US2004/008097

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6480659	B1	12-11-2002 WO 03042735 A1	22-05-2003